Radiant Australia Pty Ltd Unit 1 / 18 Profit Pass, Wangara, WA 6065 t: 08 9302 4140 f: 08 8490 2343 e: orders@radiant.com.au



ROUND HEATED

RTR530 - Standard 240V model

MIRROR POLISHED AND BRUSHED SATIN MANUFACTURED FROM 304 GRADE STAINLESS STEEL

COLOURED FINISHES MANUFACTURED FROM 201 GRADE STAINLESS STEEL IP55 RATED (COLOURED FINISHES ARE IP54 RATED)


ALL TOWEL RAILS AVAILABLE WITH EITHER BOTTOM LEFT OR RIGHT OUTPUT

ALL STANDARD RAILS ARE DUAL PURPOSE, OFFERING A PLUG AS STANDARD, BUT PACK CONTAINS A HARD WIRING KIT

CAN BE MOUNTED UPSIDE DOWN

10 YEAR WARRANTY FOR CONSTRUCTION / HEATING ELEMENT

COATING ON COLOURED RAILS ARE COVERED BY A 2 YEAR WARRANTY

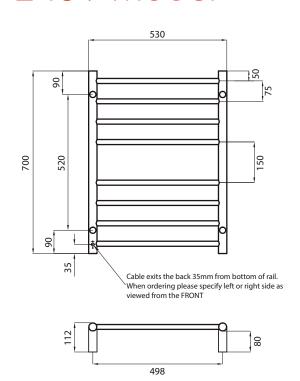

FEATURES	CODE	SIZE (MM)	FINISH
 Round bar / Height 700mm / 8 bars with a central gap / 65W (Black rail 110W) Standard model is 240V / IP55 rated 	RTR530LEFT	530x700	Polished
	RTR530RIGHT	530x700	Polished
	BRU-RTR530LEFT	530x700	Brushed Satin
Vertical bars 32mm diameter	BRU-RTR530RIGHT	530x700	Brushed Satin
Horizontal bars 19mm diameter	BRTR530LEFT	530x700	Matt Black
• 112mm from wall	BRTR530RIGHT	530x700	Matt Black
Cable length: 1.4m, plug included	BN-RTR530LEFT	530x700	Brushed Nickel
 To see our range of low voltage (12V) models please refer to our website for the 	BN-RTR530RIGHT	530x700	Brushed Nickel

complete range: radiantheating.com.au